


SPECIFICATION

- Light Source
- Input Voltage
- Input current
- Power Consumption
- Dedicated Driver
- Weight
- Dimming Control
- Dimming Range
- UL File number

LED Module (Mounted)
 AC120V(Dedicated driver input voltage)
 0.183A(AC120V input)
 21.8W(AC120V input)
 Constant current (50/60Hz shared)
 1.37 lbs,620g (Driver weight is included)
 0-10V
 3%-100%
 E477257

- delivered lumen (N)for Narrow (M)for Medium
 - life rating
 - warranty coverage
 - CRI(Ra)
 - color temperature
- 47.1Lm/W(AC120V input)
 53.1Lm/W(AC120V input)
 50,000hours. L70
 5 years
 93 typ
 2700K,3000K,3500K,4000K


Narrow



3000K / 1720Lm

E(ft-cd)	2700K	3000K	3500K	4000K
1630lm	1720lm	1760lm	1796lm	
3.28ft	1533	1618	1656	1690
6.56ft	383	404	414	422
9.84ft	170	180	184	188
13.12ft	96	101	103	106

Medium



3000K / 1720Lm

E(ft-cd)	2700K	3000K	3500K	4000K
1630lm	1720lm	1760lm	1796lm	
3.28ft	778	821	840	857
6.56ft	195	205	210	214
9.84ft	86	91	93	95
13.12ft	49	51	51	54

PRODUCT CODE

- MMP-080S/3H/W or M or S/1E/N/10B27/Z2/2
- MMP-080S/3H/W or M or S/1E/N/10B30/Z2/2
- MMP-080S/3H/W or M or S/1E/N/10B35/Z2/2
- MMP-080S/3H/W or M or S/1E/N/10B40/Z2/2
- MMP-080S/3H/W or M or S/1E/M/10B27/Z2/2
- MMP-080S/3H/W or M or S/1E/M/10B30/Z2/2
- MMP-080S/3H/W or M or S/1E/M/10B35/Z2/2
- MMP-080S/3H/W or M or S/1E/M/10B40/Z2/2


HOW TO READ THE PRODUCT CODE

MMP-080S/3H/W/1E/N/10B 27/Z2/2
 1 2 3 4 5 6 7 8 9

- 1 Basic product Series
- 2 Hood type (3H)for 10° hood
- 3 Choose the letter code to designate the desired color of Product (W)for White (M)for Matte Black (S)for Silver
- 4 Adapter Type (1E)for Eutrac Corp NA
- 5 Choose the letter code to designate the desired light distribution (N)for Narrow 11° (M)for Medium 20°
- 6 Light Source
- 7 Choose the letter code to designate the desired Color Temperature (27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- 8 Designates led driver type (Z2)for Original Driver 0-10V Dimming Control
- 9 Authentication (2)for UL/cUL

Lens Filter options

- Full-Diffuser Lens Filter MLA-080/DF01
- Semi-Diffuser Lens Filter MLA-080/DS03
- Full-Spread Lens Filter MLA-080/SF01
- Semi-Spread Lens Filter MLA-080/SS01
- Edge Control Lens Filter MLA-080/EC02
- Sharpener Lens MLA-080/SH01 (available only for narrow distribution)

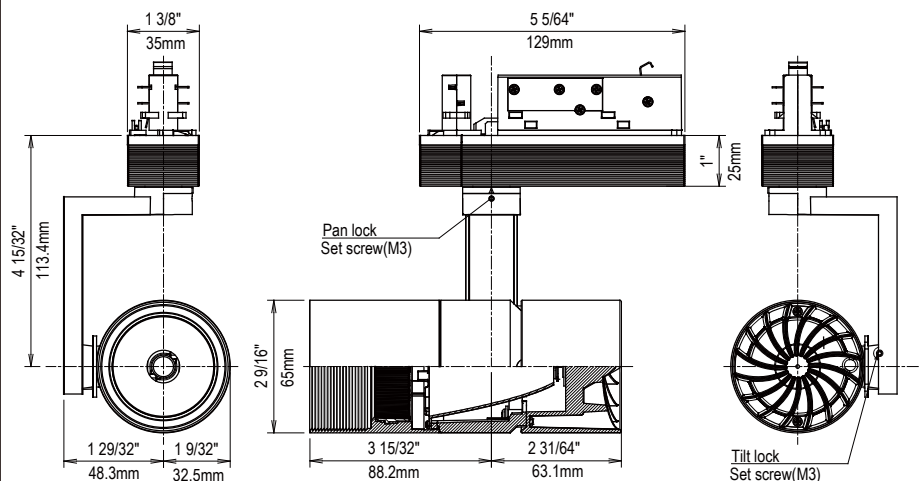

ATTENTION

- This fixture is compatible with Eutrac 2-circuit track only. The fixture attaches to both the left and right circuit rails of the track. Please ensure that only one power feed is supplied to the track.
- Use 0-10V control dimming system (DVSTV-XX(Sold separately))only.

