

SPECIFICATION


- Light Source
- Input Voltage
- Input current
- Power Consumption
- Dedicated Driver
- Weight
- Dimming Control
- Dimming Range
- UL File number

LED Module (Mounted)
AC120V(Dedicated driver input voltage)
0.183A(AC120V input)
21.8W(AC120V input)
Constant current (50/60Hz shared)
1.44 lbs,655g (Driver weight is included)
0-10V
3%-100%
E477257

- delivered lumen (N)for Narrow (M)for Medium
- life rating
- warranty coverage
- CRI(Ra)
- color temperature

39.4Lm/W(AC120V input)
45.6Lm/W(AC120V input)
50,000hours. L70
5 years
93 typ
2700K,3000K,3500K,4000K


Narrow



3000K / 1720Lm

E(ft-cd)	2700K	3000K	3500K	4000K
	1630lm	1720lm	1760lm	1796lm
3.28ft	1533	1618	1655	1689
6.56ft	383	404	414	422
9.84ft	170	180	184	188
13.12ft	96	101	103	106

Medium



3000K / 1720Lm

E(ft-cd)	2700K	3000K	3500K	4000K
	1630lm	1720lm	1760lm	1796lm
3.28ft	778	821	840	857
6.56ft	194	205	210	214
9.84ft	86	91	93	95
13.12ft	49	51	52	54

PRODUCT CODE

MMP-080S/5H/W or M or S/1E/N/10B27/Z2/2
MMP-080S/5H/W or M or S/1E/N/10B30/Z2/2
MMP-080S/5H/W or M or S/1E/N/10B35/Z2/2
MMP-080S/5H/W or M or S/1E/N/10B40/Z2/2
MMP-080S/5H/W or M or S/1E/M/10B27/Z2/2
MMP-080S/5H/W or M or S/1E/M/10B30/Z2/2
MMP-080S/5H/W or M or S/1E/M/10B35/Z2/2
MMP-080S/5H/W or M or S/1E/M/10B40/Z2/2


HOW TO READ THE PRODUCT CODE

MMP-080S/5H/W/1E/N/10B 27/Z2/2
1 2 3 4 5 6 7 8 9

- 1 Basic product Series
- 2 Hood type (5H)for 10° hood
- 3 Choose the letter code to designate the desired color of Product (W)for White (M)for Matte Black (S)for Silver
- 4 Adapter Type (1E)for Eutrac Corp NA
- 5 Choose the letter code to designate the desired light distribution (N)for Narrow 11° (M)for Medium 19°
- 6 Light Source
- 7 Choose the letter code to designate the desired Color Temperature (27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- 8 Designates led driver type (Z2)for Original Driver 0-10V Dimming Control
- 9 Authentication (2)for UL/cUL

Lens Filter options

Full-Diffuser Lens Filter MLA-080/DF01
Semi-Diffuser Lens Filter MLA-080/DS03
Full-Spread Lens Filter MLA-080/SF01
Semi-Spread Lens Filter MLA-080/SS01
Edge Control Lens Filter MLA-080/EC02
Sharpener Lens MLA-080/SH01
(available only for narrow distribution)

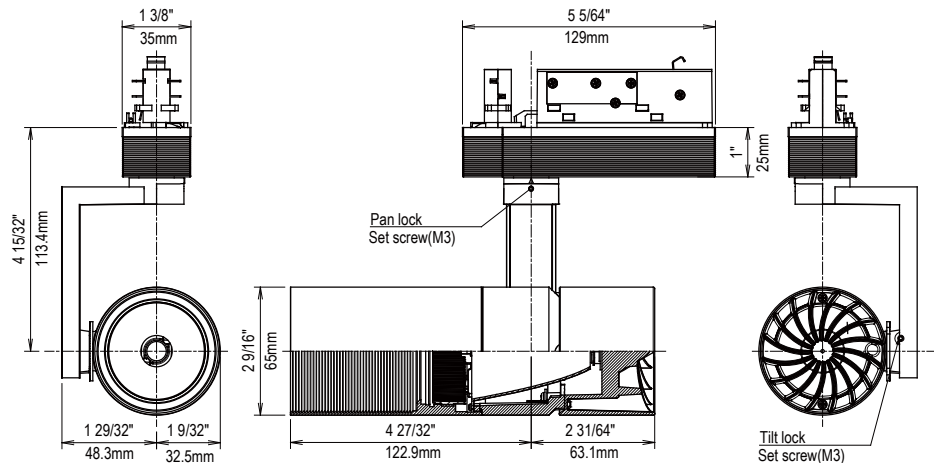

ATTENTION

- This fixture is compatible with Eutrac 2-circuit track only. The fixture attaches to both the left and right circuit rails of the track. Please ensure that only one power feed is supplied to the track.
- Use 0-10V control dimming system (DVSTV-XX(Sold separately))only.

