


SPECIFICATION

- Light Source
- Input Voltage
- Input current
- Power Consumption
- Dedicated Driver
- Weight
- Dimming Control
- Dimming Range
- UL File number

LED Module (Mounted)
 AC120V(Dedicated driver input voltage)
 0.334A(AC120V input)
 39.9W(AC120V input)
 Constant current (50/60Hz shared)
 1.8 lbs,815g (Driver weight is included)
 0-10V
 3%-100%
 E477257

- delivered lumen
(N)for Narrow
(M)for Medium
 - life rating
 - warranty coverage
 - CRI(Ra)
 - color temperature
- 43.9Lm/W(AC120V input)
 51.7Lm/W(AC120V input)
 50,000hours. L70
 5 years
 93 typ
 2700K,3000K,3500K,4000K


Narrow



3000K / 2981Lm

E(ft-cd)	2700K	3000K	3500K	4000K
2819lm	2981lm	3045lm	3106lm	
3.28ft	2369	2505	2559	2610
6.56ft	592	626	640	653
9.84ft	263	278	284	290
13.12ft	148	157	160	163

Medium



3000K / 2981Lm

E(ft-cd)	2700K	3000K	3500K	4000K
2819lm	2981lm	3045lm	3106lm	
3.28ft	1491	1576	1610	1642
6.56ft	373	394	402	411
9.84ft	166	175	179	182
13.12ft	93	98	101	103

PRODUCT CODE

- MMP-100S/1H/W or M or S/1E/N/30B27/Z2/2
- MMP-100S/1H/W or M or S/1E/N/30B30/Z2/2
- MMP-100S/1H/W or M or S/1E/N/30B35/Z2/2
- MMP-100S/1H/W or M or S/1E/N/30B40/Z2/2
- MMP-100S/1H/W or M or S/1E/M/30B27/Z2/2
- MMP-100S/1H/W or M or S/1E/M/30B30/Z2/2
- MMP-100S/1H/W or M or S/1E/M/30B35/Z2/2
- MMP-100S/1H/W or M or S/1E/M/30B40/Z2/2


HOW TO READ THE PRODUCT CODE

MMP-100S/1H/W/1E/N/30B27/Z2/2
 1 2 3 4 5 6 7 8 9

- 1 Basic product Series
- 2 Hood type
(1H)for 10° hood
- 3 Choose the letter code to designate the desired color of Product
(W)for White (M)for Matte Black (S)for Silver
- 4 Adapter Type
(1E)for Eutrac Corp NA
- 5 Choose the letter code to designate the desired light distribution
(N)for Narrow 11° (M)for Medium 19°
- 6 Light Source
- 7 Choose the letter code to designate the desired Color Temperature
(27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- 8 Designates led driver type
(Z2)for Original Driver 0-10V Dimming Control
- 9 Authentication
(2)for UL/cUL

Lens Filter options

- Full-Diffuser Lens Filter MLA-100/DF01
- Semi-Diffuser Lens Filter MLA-100/DS02
- Full-Spread Lens Filter MLA-100/SF01
- Semi-Spread Lens Filter MLA-100/SS01
- Edge Control Lens Filter MLA-100/EC02
- Sharpeners Lens MLA-100/SH01
(available only for narrow distribution)

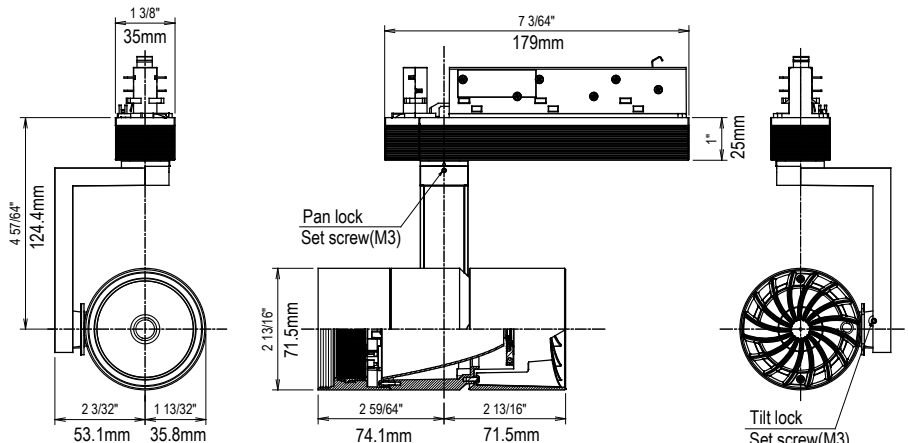

ATTENTION

- This fixture is compatible with Eutrac 2-circuit track only. The fixture attaches to both the left and right circuit rails of the track. Please ensure that only one power feed is supplied to the track.
- Use 0-10V control dimming system (DVSTV-XX(Sold separately))only.

