


SPECIFICATION


<ul style="list-style-type: none"> <li>● Light Source</li> <li>● Input Voltage</li> <li>● Input current</li> <li>● Power Consumption</li> <li>● Dedicated Driver</li> <li>● Weight</li> <li>● Dimming Control</li> <li>● Dimming Range</li> <li>● UL File number</li> </ul>	<p>LED Module (Mounted)                  AC120V(Dedicated driver input voltage)                  0.334A(AC120V input)                  39.9W(AC120V input)                  Constant current ( 50/60Hz shared)                  1.88 lbs,855g (Driver weight is included)                  -                  E477257</p>	<ul style="list-style-type: none"> <li>● delivered lumen (N)for Narrow (M)for Medium</li> <li>● life rating</li> <li>● warranty coverage</li> <li>● CRI(Ra)</li> <li>● color temperature</li> </ul> <p>40.8Lm/W(AC120V input)                  48.4Lm/W(AC120V input)                  50,000hours. L70                  5 years                  93 typ                  2700K,3000K,3500K,4000K</p>
---	---	---

**Narrow**



E(ft-cd)	2700K	3000K	3500K	4000K
2819lm	2981lm	3045lm	3106lm	
3.28ft	2365	2501	2555	2606
6.56ft	591	625	639	651
9.84ft	263	278	284	289
13.12ft	148	156	160	163

**Medium**



E(ft-cd)	2700K	3000K	3500K	4000K
2819lm	2981lm	3045lm	3106lm	
3.28ft	1476	1561	1595	1626
6.56ft	369	390	399	406
9.84ft	164	173	177	180
13.12ft	92	98	100	101

**PRODUCT CODE**

- MMP-100S/SH/W or M or S/1N/N/30B27/N1/2
- MMP-100S/SH/W or M or S/1N/N/30B30/N1/2
- MMP-100S/SH/W or M or S/1N/N/30B35/N1/2
- MMP-100S/SH/W or M or S/1N/N/30B40/N1/2
- MMP-100S/SH/W or M or S/1N/M/30B27/N1/2
- MMP-100S/SH/W or M or S/1N/M/30B30/N1/2
- MMP-100S/SH/W or M or S/1N/M/30B35/N1/2
- MMP-100S/SH/W or M or S/1N/M/30B40/N1/2


**HOW TO READ THE PRODUCT CODE**

MMP-100S/SH/W/1N/N/30B27/N1/2  
 1 2 3 4 5 6 7 8 9

- 1 Basic product Series
- 2 Hood type  
(SH)for Slant hood
- 3 Choose the letter code to designate the desired color of Product  
(W)for White (M)for Matte Black (S)for Silver
- 4 Adapter Type  
(1N)for NORDIC ALUMINIUM INC
- 5 Choose the letter code to designate the desired light distribution  
(N)for Narrow 11° (M)for Medium 20°
- 6 Light Source
- 7 Choose the letter code to designate the desired Color Temperature  
(27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- 8 Designates led driver type  
(N1)for Non-Dimming
- 9 Authentication  
(2)for UL/cUL

**Lens Filter options**

Full-Diffuser Lens Filter	MLA-100/DF01
Semi-Diffuser Lens Filter	MLA-100/DS02
Full-Spread Lens Filter	MLA-100/SF01
Semi-Spread Lens Filter	MLA-100/SS01
Edge Control Lens Filter	MLA-100/EC02
Sharpener Lens	MLA-100/SH01
(available only for narrow distribution)	

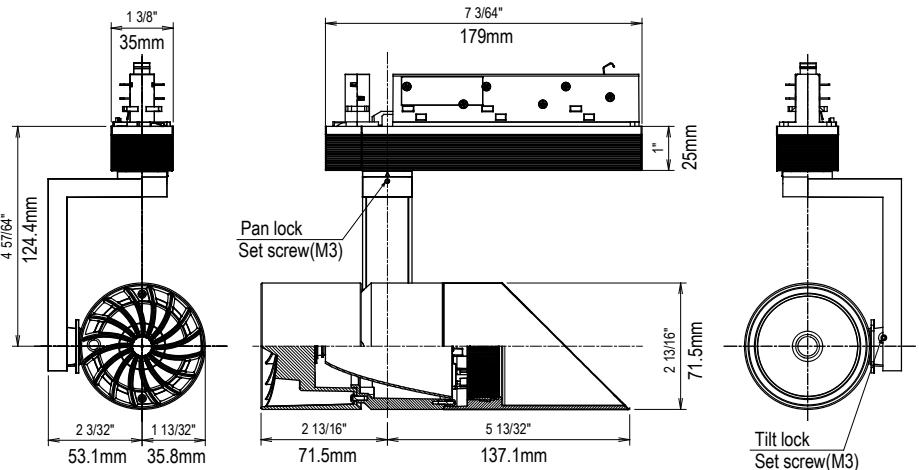

**ATTENTION**

• This fixture is compatible with NORDIC ALUMINIUM 2-circuit track only. The fixture attaches to both the left and right circuit rails of the track. Please ensure that only one power feed is supplied to the track.

