

SERIES


ModuleX 130

FUNCTION

Adjustable Downlight

CAT.NO.

MMP-130A



SPECIFICATION

- Light Source LED Module (Mounted)
- Input Voltage AC120-277V(Dedicated driver input voltage)
- Input Current 0.441A(AC120V input),0.196A(AC277V input)
- Power Consumption 52 W(AC120V input),50.9W(AC277V input)
- Dedicated Driver Constant current (50/60Hz shared)
- Fixture Input Voltage 36.8V
- Fixture Input Current 1.2A
- Weight 7.2 lbs,2.42kg(Driver weight is included)
- Dimming Control 0-10V
- Dimming Range 10%-100%
- UL File number E472786
- delivered lumen (N)for Narrow 43.8Lm/W(AC120V input),44.7Lm/W(AC277V input)
- (M)for Medium 51.7Lm/W(AC120V input),52.8Lm/W(AC277V input)
- life rating 50000hours. L70
- warranty coverage 5 years
- CRI(Ra) 93 typ
- color temperature 2700K,3000K,3500K,4000K

Narrow

Solid line:vertically / Dotted line:tilt angel:25°

N CC		11°
H(ft)	E(ft-cd)	D(ft)
3.28	3332	0.69
6.56	833	1.38
9.84	370	2.07
13.12	208	2.76

3000K / 4390Lm

E(ft-cd)	2700K	3000K	3500K	4000K
	4161lm	4390lm	4488lm	4577lm
3.28ft	3158	3332	3406	3474
6.56ft	789	833	852	868
9.84ft	351	370	378	386
13.12ft	197	208	213	217

Medium

Solid line:vertically / Dotted line:tilt angel:25°

M CC		19°
H(ft)	E(ft-cd)	D(ft)
3.28	2161	1.15
6.56	540	2.30
9.84	240	3.44
13.12	135	4.59

3000K / 4390Lm

E(ft-cd)	2700K	3000K	3500K	4000K
	4161lm	4390lm	4488lm	4577lm
3.28ft	2048	2161	2209	2253
6.56ft	512	540	552	563
9.84ft	228	240	245	250
13.12ft	128	135	138	141

PRODUCT CODE

MMP-130A/WC/SWF/N or M/40B27/Z1/2
MMP-130A/WC/SWF/N or M/40B30/Z1/2
MMP-130A/WC/SWF/N or M/40B35/Z1/2
MMP-130A/WC/SWF/N or M/40B40/Z1/2
MMP-130A/MC/SWF or SMF/N or M/40B27/Z1/2
MMP-130A/MC/SWF or SMF/N or M/40B30/Z1/2
MMP-130A/MC/SWF or SMF/N or M/40B35/Z1/2
MMP-130A/MC/SWF or SMF/N or M/40B40/Z1/2
MMP-130A/CC/SWF or SMF/N or M/40B27/Z1/2
MMP-130A/CC/SWF or SMF/N or M/40B30/Z1/2
MMP-130A/CC/SWF or SMF/N or M/40B35/Z1/2
MMP-130A/CC/SWF or SMF/N or M/40B40/Z1/2


HOW TO READ THE PRODUCT CODE

MMP-130A/CC/SWF/M/40B27/Z1/2
1 2 3 4 5 6 7 8




- Basic product Series
- Choose the letter code to designate the desired color of cone (WC)for White cone (MC)for Matte black cone (CC) Chrome cone
- Choose the letter code to designate the desired color of Trim (SWF)for White (SMF)for Matte black
- Choose the letter code to designate the desired light distribution (N)for Narrow 11° (M)for Medium 19°
- Light Source
- Choose the letter code to designate the desired Color Temperature (27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- Designates led driver type
- (1)for HIGH PERFECTION,Cat No. LF1048-42-C1200-010V Authentication
- (2)for UL

Lens Filter options

Full-Diffuser Lens Filter MLA-130/DF01
Semi-Diffuser Lens Filter MLA-130/DS02
Full-Spread Lens Filter MLA-130/SF01
Semi-Spread Lens Filter MLA-130/SS01
Edge Control Lens Filter MLA-130/EC02
Sharpeners Lens MLA-130/SH01
(available only for narrow distribution)



Ceiling Hole Diameter

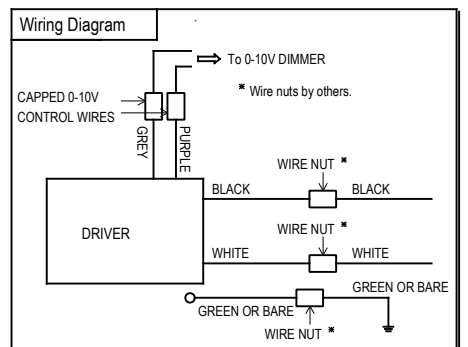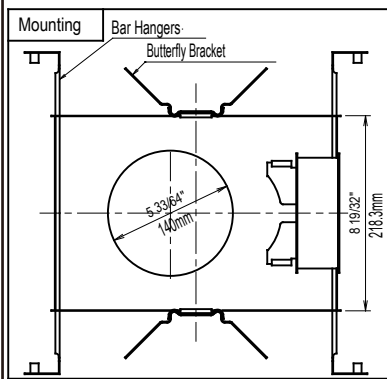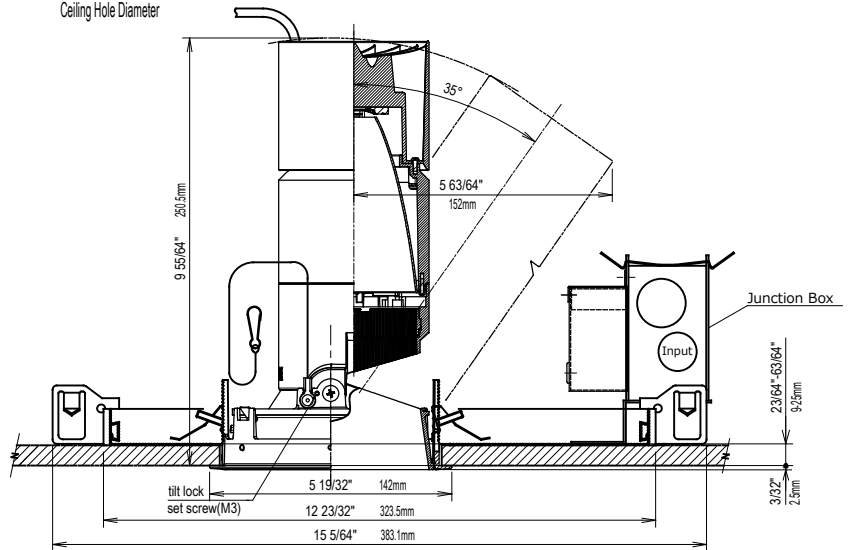

ModuleX
ModuleX Inc.

SPECIFICATION SHEET

CREATED DATE
3/27/2017

REVISION DATE
7/27/2018