



**SPECIFICATION**

- Light Source LED Module (Mounted)
- Input Voltage AC120V(Dedicated driver input voltage)
- Input current 0.454A(AC120V input)
- Power Consumption 53.9W(AC120V input)
- Dedicated Driver Constant current ( 50/60Hz shared)
- Weight 2.58 lbs,1170g (Driver weight is included)
- Dimming Control 0-10V
- Dimming Range 3%-100%
- UL File number E477257
- delivered lumen  
(N)for Narrow 35.5Lm/W(AC120V input)  
(M)for Medium 43.5Lm/W(AC120V input)
- life rating 50,000hours. L70
- warranty coverage 5 years
- CRI(Ra) 93 typ
- color temperature 2700K,3000K,3500K,4000K

Narrow



Medium



| E(ft-cd) | 2700K  | 3000K  | 3500K  | 4000K |
|----------|--------|--------|--------|-------|
| 4181lm   | 4390lm | 4488lm | 4577lm |       |
| 3.28ft   | 3607   | 3805   | 3890   | 3967  |
| 6.56ft   | 902    | 951    | 973    | 992   |
| 9.84ft   | 401    | 423    | 432    | 441   |
| 13.12ft  | 225    | 238    | 243    | 248   |


**PRODUCT CODE**

- MMP-130S/5H/W or M or S/1E/N/40B27/Z2/2
- MMP-130S/5H/W or M or S/1E/N/40B30/Z2/2
- MMP-130S/5H/W or M or S/1E/N/40B35/Z2/2
- MMP-130S/5H/W or M or S/1E/N/40B40/Z2/2
- MMP-130S/5H/W or M or S/1E/M/40B27/Z2/2
- MMP-130S/5H/W or M or S/1E/M/40B30/Z2/2
- MMP-130S/5H/W or M or S/1E/M/40B35/Z2/2
- MMP-130S/5H/W or M or S/1E/M/40B40/Z2/2

**HOW TO READ THE PRODUCT CODE**

MMP-130S/5H/W/1E/N/40B27/Z2/2  
1 2 3 4 5 6 7 8 9

- 1 Basic product Series
- 2 Hood type (5H)for 50° hood
- 3 Choose the letter code to designate the desired color of Product (W)for White (M)for Matte Black (S)for Silver
- 4 Adapter Type (1E)for Eutrac Corp NA
- 5 Choose the letter code to designate the desired light distribution (N)for Narrow 11° (M)for Medium 18°
- 6 Light Source
- 7 Choose the letter code to designate the desired Color Temperature (27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- 8 Designates led driver type (Z2)for Original Driver 0-10V Dimming Control
- 9 Authentication (2)for UL/cUL

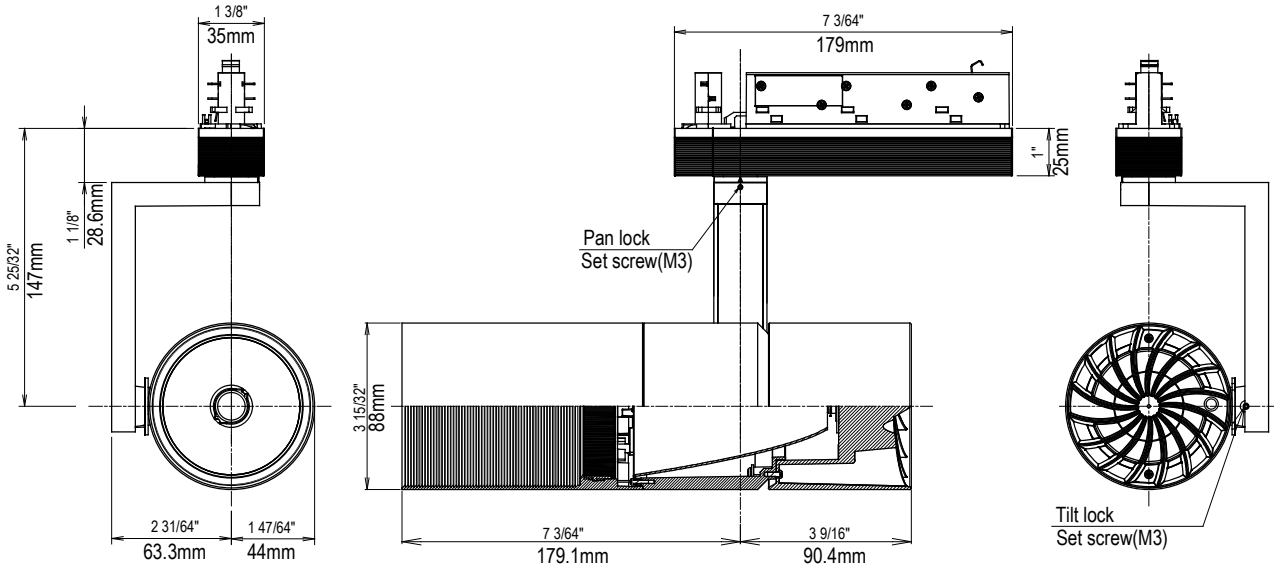

**ATTENTION**

- This fixture is compatible with Eutrac 2-circuit track only. The fixture attaches to both the left and right circuit rails of the track. Please ensure that only one power feed is supplied to the track.
- Use 0-10V control dimming system (DVSTV-XX(Sold separately))only.

**Lens Filter options**

- Full-Diffuser Lens Filter MLA-130/DF01
- Semi-Diffuser Lens Filter MLA-130/DS02
- Full-Spread Lens Filter MLA-130/SF01
- Semi-Spread Lens Filter MLA-130/SS01
- Edge Control Lens Filter MLA-130/EC02
- Sharpener Lens MLA-130/SH01 (available only for narrow distribution)

