

SPECIFICATION

- Light Source
- Input Voltage
- Input current
- Power Consumption
- Dedicated Driver
- Weight
- Dimming Control
- Dimming Range
- UL File number

LED Module (Mounted)
AC120V(Dedicated driver input voltage)
0.129A(AC120V input)
15.4W(AC120V input)
Constant current (50/60Hz shared)
0.84 lbs,380g (Driver weight is included)
0-10V
3%-100%
E477257

- delivered lumen (N)for Narrow (M)for Medium
 - life rating
 - warranty coverage
 - CRI(Ra)
 - color temperature
- 36.8Lm/W(AC120V input)
39.2Lm/W(AC120V input)
50,000hours. L70
5 years
93 typ
2400K,2700K,3000K,3500K,4000K

Narrow

	N	11°
H(ft)	E(ft-cd)	D(ft)
3.28	828	0.66
6.56	207	1.31
9.84	92	1.97
13.12	52	2.62

3000K / 1042Lm

E(ft-cd)	2400K	2700K	3000K	3500K	4000K
	941lm	992lm	1042lm	1068lm	1088lm
3.28ft	748	789	828	849	865
6.56ft	187	197	207	212	216
9.84ft	83	88	92	94	96
13.12ft	47	49	52	53	54

Medium

	M	19°
H(ft)	E(ft-cd)	D(ft)
3.28	493	1.15
6.56	123	2.30
9.84	55	3.44
13.12	31	4.59

3000K / 1042Lm

E(ft-cd)	2400K	2700K	3000K	3500K	4000K
	941lm	992lm	1042lm	1068lm	1088lm
3.28ft	445	469	493	505	515
6.56ft	111	117	123	126	129
9.84ft	49	52	55	56	57
13.12ft	28	29	31	31	32

PRODUCT CODE

MMP-060S/3H/W or M or S/1E/N/10A24/Z1/2
MMP-060S/3H/W or M or S/1E/N/10A27/Z1/2
MMP-060S/3H/W or M or S/1E/N/10A30/Z1/2
MMP-060S/3H/W or M or S/1E/N/10A35/Z1/2
MMP-060S/3H/W or M or S/1E/N/10A40/Z1/2
MMP-060S/3H/W or M or S/1E/M/10A24/Z1/2
MMP-060S/3H/W or M or S/1E/M/10A27/Z1/2
MMP-060S/3H/W or M or S/1E/M/10A30/Z1/2
MMP-060S/3H/W or M or S/1E/M/10A35/Z1/2
MMP-060S/3H/W or M or S/1E/M/10A40/Z1/2


HOW TO READ THE PRODUCT CODE

MMP-060S/3H/W/1E/N/10A 27/Z1/2
1 2 3 4 5 6 7 8 9

- Basic product Series
- Hood type
(3H)for 30° hood
- Choose the letter code to designate the desired color of Product
(W)for White (M)for Matte Black (S)for Silver
- Adapter Type
(1E)for Eutrac Corp NA
- Choose the letter code to designate the desired light distribution
(N)for Narrow 11° (M)for Medium 19°
- Light Source
- Choose the letter code to designate the desired Color Temperature
(24)for 2400K (27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- Designates led driver type
(Z1)for Original Driver 0-10V Dimming Control
- Authentication
(2)for UL/cUL

Lens Filter options

Full-Diffuser Lens Filter MLA-060/DF01
Semi-Diffuser Lens Filter MLA-060/DS01
Full-Spread Lens Filter MLA-060/SF01
Semi-Spread Lens Filter MLA-060/SS01
Edge Control Lens Filter MLA-060/EC01
Sharpener Lens MLA-060/SH01
(available only for narrow distribution)

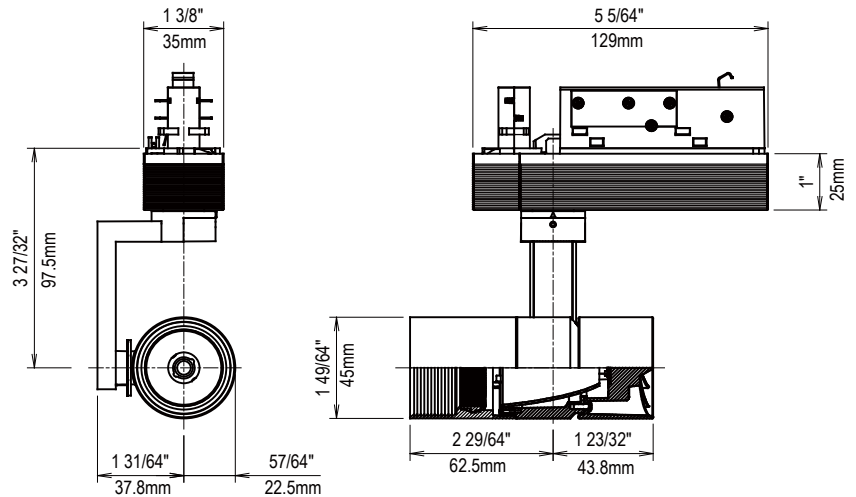

ATTENTION

- This fixture is compatible with Eutrac 2-circuit track only. The fixture attaches to both the left and right circuit rails of the track. Please ensure that only one power feed is supplied to the track.
- Use 0-10V control dimming system (DVSTV-XX(Sold separately))only.

