


**SPECIFICATION**

- Light Source
- Input Voltage
- Input current
- Power Consumption
- Dedicated Driver
- Weight
- Dimming Control
- Dimming Range
- UL File number

LED Module (Mounted )  
AC120V(Dedicated driver input voltage)  
0.129A(AC120V input)  
15.4W(AC120V input)  
Constant current ( 50/60Hz shared)  
0.84 lbs,380g (Driver weight is included)  
0-10V  
3%-100%  
E477257

- delivered lumen  
(N)for Narrow  
(M)for Medium
  - life rating
  - warranty coverage
  - CRI(Ra)
  - color temperature
- 35.8Lm/W(AC120V input)  
40.0Lm/W(AC120V input)  
50,000hours. L70  
5 years  
93 typ  
2400K,2700K,3000K,3500K,4000K


**Narrow**



3000K / 1042Lm

E(ft-cd)	2400K	2700K	3000K	3500K	4000K
941lm	992lm	1042lm	1068lm	1088lm	
3.28ft	741	781	820	841	856
6.56ft	185	195	205	210	214
9.84ft	82	87	91	93	95
13.12ft	46	49	51	52	54

**Medium**



3000K / 1042Lm

E(ft-cd)	2400K	2700K	3000K	3500K	4000K
941lm	992lm	1042lm	1068lm	1088lm	
3.28ft	442	466	489	501	511
6.56ft	110	116	122	125	128
9.84ft	49	52	54	56	57
13.12ft	28	29	31	31	32

**PRODUCT CODE**

MMP-060S/SH/W or M or S/1E/N/10A24/Z1/2  
MMP-060S/SH/W or M or S/1E/N/10A27/Z1/2  
MMP-060S/SH/W or M or S/1E/N/10A30/Z1/2  
MMP-060S/SH/W or M or S/1E/N/10A35/Z1/2  
MMP-060S/SH/W or M or S/1E/N/10A40/Z1/2  
MMP-060S/SH/W or M or S/1E/M/10A24/Z1/2  
MMP-060S/SH/W or M or S/1E/M/10A27/Z1/2  
MMP-060S/SH/W or M or S/1E/M/10A30/Z1/2  
MMP-060S/SH/W or M or S/1E/M/10A35/Z1/2  
MMP-060S/SH/W or M or S/1E/M/10A40/Z1/2


**HOW TO READ THE PRODUCT CODE**

MMP-060S/SH/W/1E/N/10A 27/Z1/2  
1 2 3 4 5 6 7 8 9

- 1 Basic product Series
- 2 Hood type  
(SH)for Slant hood
- 3 Choose the letter code to designate the desired color of Product  
(W)for White (M)for Matte Black (S)for Silver
- 4 Adapter Type  
(1E)for Eutrac Corp NA
- 5 Choose the letter code to designate the desired light distribution  
(N)for Narrow 11° (M)for Medium 19°
- 6 Light Source
- 7 Choose the letter code to designate the desired Color Temperature  
(24)for 2400K (27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- 8 Designates led driver type  
(Z1)for Original Driver 0-10V Dimming Control
- 9 Authentication  
(2)for UL/cUL

**Lens Filter options**

Full-Diffuser Lens Filter	MLA-060/DF01
Semi-Diffuser Lens Filter	MLA-060/DS01
Full-Spread Lens Filter	MLA-060/SF01
Semi-Spread Lens Filter	MLA-060/SS01
Edge Control Lens Filter	MLA-060/EC01
Sharpener Lens	MLA-060/SH01
(available only for narrow distribution)	

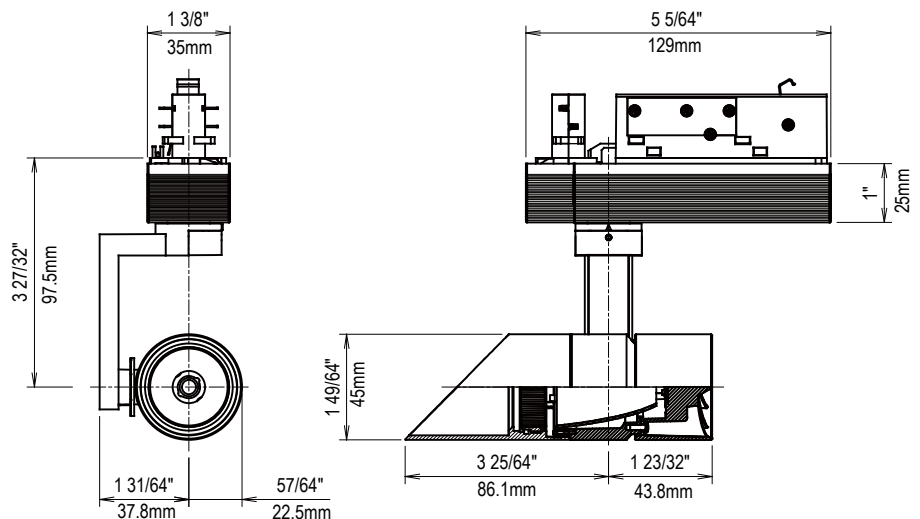

**ATTENTION**

- **This fixture is compatible with Eutrac 2-circuit track only.** The fixture attaches to both the left and right circuit rails of the track. Please ensure that only one power feed is supplied to the track.
- **Use 0-10V control dimming system (DVSTV-XX(Sold separately))only.**

