



**SPECIFICATION**

- Light Source LED Module (Mounted)
- Input Voltage AC120-277V (Dedicated driver input voltage)
- Input Current 0.252A(AC120V input),0.121A(AC277V input)
- Power Consumption 30.1W(AC120V input),31.6W(AC277V input)
- Dedicated Driver Constant current ( 50/60Hz shared)
- Fixture Input Voltage 36.8V
- Fixture Input Current 0.7A
- Weight 2.39 lbs,1.08kg(Driver weight is included)
- Dimming Control 0-10V
- Dimming Range 10%-100%
- UL File number E472786
- delivered lumen 26.9Lm/W(AC120V input)  
25.7Lm/W(AC277V input)
- life rating 50,000hours. L70
- warranty coverage 5 years
- CRI(Ra) 93 typ
- color temperature 2700K,3000K,3500K,4000K

Solid line:Wall/Vertically  
Dotted line:Wall/Horizontal



3000K / 2338Lm




**PRODUCT CODE**

- MMP-080W/WC/SWF/0/20B27/Z1/2
- MMP-080W/WC/SWF/0/20B30/Z1/2
- MMP-080W/WC/SWF/0/20B35/Z1/2
- MMP-080W/WC/SWF/0/20B40/Z1/2
- MMP-080W/MC/SWF or SMF/0/20B27/Z1/2
- MMP-080W/MC/SWF or SMF/0/20B30/Z1/2
- MMP-080W/MC/SWF or SMF/0/20B35/Z1/2
- MMP-080W/MC/SWF or SMF/0/20B40/Z1/2
- MMP-080W/CC/SWF or SMF/0/20B27/Z1/2
- MMP-080W/CC/SWF or SMF/0/20B30/Z1/2
- MMP-080W/CC/SWF or SMF/0/20B35/Z1/2
- MMP-080W/CC/SWF or SMF/0/20B40/Z1/2


**HOW TO READ THE PRODUCT CODE**

MMP-080W/CC/SWF/0/20B27/Z1/2  
1 2 3 4 5 6 7 8

- 1 Basic product Series
- 2 Choose the letter code to designate the desired color of cone (WC)for White cone (MC)for Matte black cone (CC)for Chrome cone
- 3 Choose the letter code to designate the desired color of Trim (SWF)for White (SMF)for matte black
- 4 Choose the letter code to designate the desired light distribution (0)for Wall
- 5 Light Source
- 6 Choose the letter code to designate the desired Color Temperature (27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K
- 7 Designates led driver type (1)for HIGH PERFECTION,Cat No. LP1036-36-C0700-010V
- 8 Authentication (2)for UL/cUL

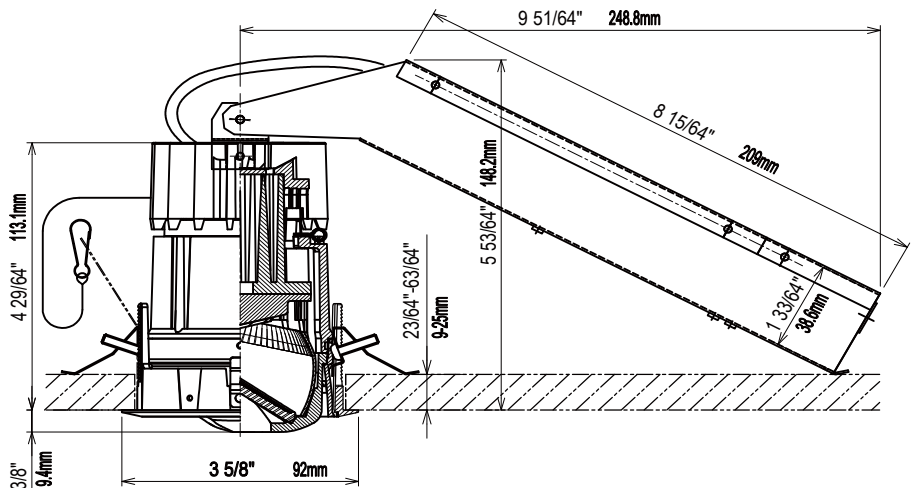

**Ceiling Hole Diameter**



**Wiring Diagram**

