**FUNCTION** 

CAT,NO.

**ModuleX** 

## PRISM Wall washer

## MPP-10/1200/S



**SPECIFICATION** 

• Single Model

Light Source

CRI(Ra)

Length

LED Module (Mounted) 2400K.2700K.3000K.3500K.4000K Color Temperature

Typ 83(2400K)

Typ 93(2700K,3000K,3500K,4000K)

1200mm 24V

Fixture Input Voltage Fixture Input Current 1.23A 3.20 lbs,1.45kg

Weight

Attached Safety Wire Warranty Coverage

5 years

Mounting (sold separately)

MMT-10/1200/SF/W - B Mounting Frame

Mounting Plate MMT-10/1200/MP

DC cable for Power connection(Sold Separately)

MPP-OP/DC01/1000 - 3000

Exclusive Driver(Sold Separately)

Please use the DC cable(sold separately)

for power connection.

Dimmer (Sold Separately)

COS15 11ft-cd 7ft-cd 6ft-cd 4ft-cd 6:56ft

2ft-cd

1.96ft from wall

9.84f


3000K / 3250Lm

720cd

COS45

RO 60 7ft-cd 6ft-cd 6.56ft 4ft-cd 2ff-cd 9.84ft áо° 30 720cd 1.96ft from wall 3000K / 3250Lm

COS90



PRODUCT CODE


MPP-10/1200/COS15 or 45 or 90/S/24K MPP-10/1200/COS15 or 45 or 90/S/27K MPP-10/1200/COS15 or 45 or 90/S/30K MPP-10/1200/COS15 or 45 or 90/S/35K MPP-10/1200/COS15 or 45 or 90/S/40K

Irradiation Direction(Wall)

HOW TO READ THE PRODUCT CODE

MPP-10/1200/COS15/S/24K

- Basic product series
- Size variation
- Length
- Choose the number code to designate the desired light distribution (15)for COS15 (45)for COS45 (90)for COS90
- Body type
- Choose the number code to designate the desired Color Temperature (24)for 2400K (27)for 2700K (30)for 3000K (35)for 3500K (40)for 4000K

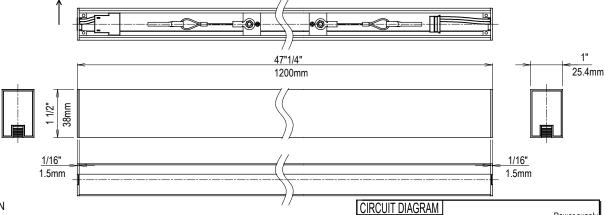

## ATTENTION

- The fixture is for indoor use only in general conditions. It cannot be used in high humidity conditions.
- Emission color and brightness might be different even within the same model.
- Make sure that the installation surface of the fixture has no unevenness before installation.
- Keep distance of the fixtures and objects at 0.2m or more.
- Be careful when handing the fixture. The edge of the product may cut and cause injury. Do not cover fixtures with heat insulator and acoustic materials.

- Use within 0°C ~ 35°C ambient temperature range.

  Do not use a radio or TV near the fixtures. The unit may generate noise in the radio or TV.
- Ensure that the safety wire is connected to the safety wire mounting bracket.
- Do not install on places that are unstable or have no reinforcement.
- This equipment is exclusively used for installation on the ceiling only. It can not be mounted on an inclined ceiling or wall. Do not install in any directions other than downward.
- Even if this product is used indoors, do not use the fixture near places where there would be anything that contains sulfur. (Some foods, medicines, paper products, rubber products and exhaust gas from vehicles may contain sulfur.)

In order to use it safely, please be sure to read the installation guide before using.



SPECIFICATION SHEET

**SCALE** 

CREATED DATE 21/10/2019

Input connector

**REVISION DATE** 

★Refer to the installation guide for installation method.

Exclusive Driver(Sold Separately)

Output connector

Power supply

Dimming signa

(Sold Separately)

is firmly fixed

after plugging in.

Fixture

XCheck that the connector

1/3