

# ModuleX® PRISM Platform

**WALL**

data download COS90/L data download COS90/R data download COS90/J

## MPP-10/0300/COS90/L.R.J



### Product code

[ ex : 300mm / COS90 / Connecting model(left) / 2400K ]

### MPP-10/0300/COS90/L/24K

Basic Product Series	Size variation	Length	Light distribution	Body type	Color temperature
----------------------	----------------	--------	--------------------	-----------	-------------------


Left MPP-10/0300/COS90/L/24K.27K.30K.35K.40K  
 Right MPP-10/0300/COS90/R/24K.27K.30K.35K.40K  
 Joint MPP-10/0300/COS90/J/24K.27K.30K.35K.40K

### Products Specifications

- Fixture's input voltage 24V
- Luminance flux 740 ~ 850 lm
- Color rendering CRI (Ra)=2700k,3000k,3500k,4000k : 93(typ) /2400k : 83(typ)
- Fixture's weight 0.82 lbs
- Light distribution COS90
- Fixture's input current 0.308A
- Aiming distance 0.2m (7 7/8 in)


### Light distribution

#### COS90




3000K / 814Lm

### Size

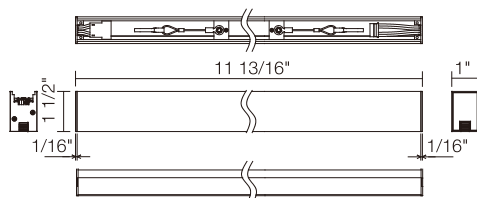

### Installation

#### Mounting frame



#### Mounting plat



### Mounting (Sold separately)

- Mounting frame MMT-10/0300/EF.W,B  
MMT-10/0600/EF.SF.W,B
- Mounting plat MMT-10/0300/MP  
MMT-10/0600/MP

### DC cable for power connection (Sold Separately)

- 39 3/8" MPP-OP/DC01/1000
- 118 7/64" MPP-OP/DC01/3000

### Exclusive Driver (Sold Separately)

※ please use the DC cable for power connection

### Dimmer (Sold Separately)

www.modulexlighting.com

### Contact

**Mosheo Corporation**  
 2B Airport Drive Ext. Hopedale, MA 01747  
 Phone : +1-774-804-3280  
 E-mail : ModuleXSales@Mosheocorp.com

**ModuleX®**

December.2020