

# ModuleX<sup>®</sup> PRISM Platform

**AMBIENT**

[data download](#) FW/L  
 [data download](#) FW/R  
 [data download](#) FW/J  
 [data download](#) FF/L  
 [data download](#) FF/R  
 [data download](#) FF/J

## MPP-10/0600/FW.FF/L.R.J



### Product code

[ ex : 600mm /Foundation(wide)/Connecting model(left) / 2400K ]

### MPP-10/0600/FW/L/24K


Basic Product Series	Size variation	Length	Light distribution	Body type	Color temperature
----------------------	----------------	--------	--------------------	-----------	-------------------

Left	Wide	MPP-10/0600/FW/L/24K.27K.30K.35K.40K
	Flood	MPP-10/0600/FF/L/24K.27K.30K.35K.40K
Right	Wide	MPP-10/0600/FW/R/24K.27K.30K.35K.40K
	Flood	MPP-10/0600/FF/R/24K.27K.30K.35K.40K
Joint	Wide	MPP-10/0600/FW/J/24K.27K.30K.35K.40K
	Flood	MPP-10/0600/FF/J/24K.27K.30K.35K.40K

### Products Specifications


- Fixture's input voltage 24V
- Luminance flux 2,960 ~ 3,400 lm
- Color rendering CRI (Ra)=2700k,3000k,3500k,4000k : 93(typ) /2400k : 83(typ)
- Fixture's weight 1.43 lbs
- Light distribution Wide (51°) / Flood (66°)
- Fixture's input current 1.23A
- Aiming distance 0.2m (7 7/8 in)

### Size

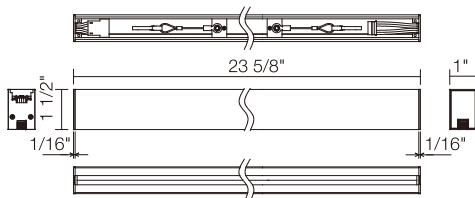


### Installation

#### Mounting frame

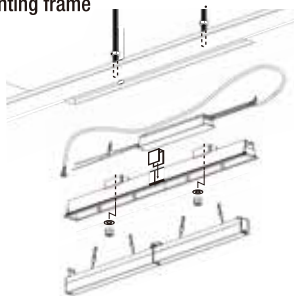


#### Mounting plat

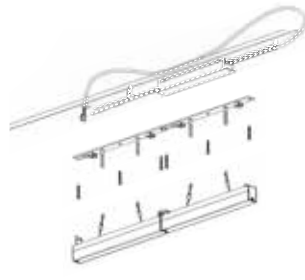


### Light distribution

#### Foundation Wide : 51°

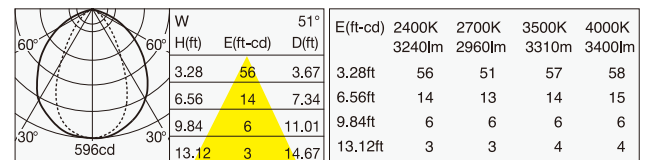

#### Foundation Flood : 66°

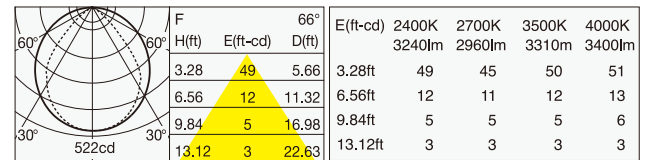

### Mounting (Sold separately)

- Mounting frame MMT-10/0600/EF./W.B  
MMT-10/1200/EF.SF./W.B
- Mounting plat MMT-10/0600/MP  
MMT-10/1200/MP

### DC cable for power connection (Sold Separately)

- 39 3/8" MPP-OP/DC02/1000
- 118 7/64" MPP-OP/DC02/3000

### Exclusive Driver (Sold Separately)

※ please use the DC cable for power connection

### Dimmer (Sold Separately)

www.modulexlighting.com

### Contact

**Mosheo Corporation**  
 2B Airport Drive Ext. Hopedale, MA 01747  
 Phone : +1-774-804-3280  
 E-mail : ModuleXSales@Mosheocorp.com

**ModuleX<sup>®</sup>**

December.2020