

# ModuleX<sup>®</sup> PRISM Platform

**AMBIENT**

[data download](#) FW/L  
 [data download](#) FW/R  
 [data download](#) FW/J  
 [data download](#) FF/L  
 [data download](#) FF/R  
 [data download](#) FF/J

## MPP-10/1200/FW.FF/L.R.J



### Product code

[ ex : 1200mm /Foundation(wide)/Connecting model(left) / 2400K ]

### MPP-10/1200/FW/L/24K


Basic Product Series	Size variation	Length	Light distribution	Body type	Color temperature
----------------------	----------------	--------	--------------------	-----------	-------------------

Left	Wide	MPP-10/1200/FW/L/24K.27K.30K.35K.40K
	Flood	MPP-10/1200/FF/L/24K.27K.30K.35K.40K
Right	Wide	MPP-10/1200/FW/R/24K.27K.30K.35K.40K
	Flood	MPP-10/1200/FF/R/24K.27K.30K.35K.40K
Joint	Wide	MPP-10/1200/FW/J/24K.27K.30K.35K.40K
	Flood	MPP-10/1200/FF/J/24K.27K.30K.35K.40K

### Products Specifications


- Fixture's input voltage 24V
- Luminance flux 5,920 ~ 6,800 lm
- Color rendering CRI (Ra)=2700k,3000k,3500k,4000k : 93(typ) /2400k : 83(typ)
- Fixture's weight 2.86 lbs
- Light distribution Wide (53°) / Flood (65°)
- Fixture's input current 2.46A
- Aiming distance 0.2m (7 7/8 in)

### Size

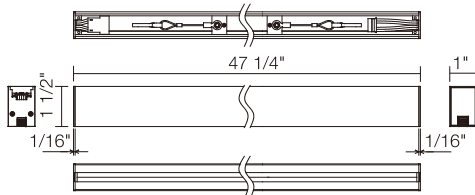


### Installation

Mounting frame

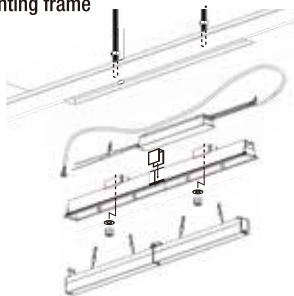

Mounting plat



### Light distribution

#### Foundation Wide : 53°

W	53°			E(ft-cd)	2400K	2700K	3500K	4000K
	H(ft)	E(ft-cd)	D(ft)					
3.28	118	3.72	3.28ft	118	108	121	124	
6.56	30	7.43	6.56ft	30	27	30	31	
9.84	13	11.15	9.84ft	13	12	13	14	
13.12	7	14.86	13.12ft	7	7	8	8	

3000K / 6500Lm

#### Foundation Flood : 65°

F	65°			E(ft-cd)	2400K	2700K	3500K	4000K
	H(ft)	E(ft-cd)	D(ft)					
3.28	96	5.76	3.28ft	96	87	97	100	
6.56	24	11.52	6.56ft	24	22	24	25	
9.84	11	17.28	9.84ft	11	10	11	11	
13.12	6	23.04	13.12ft	6	5	6	6	

3000K / 6500Lm

### Mounting (Sold separately)

- Mounting frame MMT-10/1200/EF,JF,W,B
- Mounting plat MMT-10/1200/MP

### DC cable for power connection (Sold Separately)

- 39 3/8" MPP-OP/DC02/1000
- 118 7/64" MPP-OP/DC02/3000

### Exclusive Driver (Sold Separately)

※ please use the DC cable for power connection

### Dimmer (Sold Separately)

www.modulexlighting.com

Contact

**Mosheo Corporation**  
 2B Airport Drive Ext. Hopedale, MA 01747  
 Phone : +1-774-804-3280  
 E-mail : ModuleXSales@Mosheocorp.com

**ModuleX<sup>®</sup>**

December.2020